


CR-O*** Cable Glands featuring CROCLOCK® – ASSEMBLY INSTRUCTIONS

Brief Description

The Peppers CR-O*** type cable gland featuring CROCLOCK® universal armour clamping is for outdoor use in the appropriate Hazardous Areas with armoured cable. It gives environmental protection to IP66 and Deluge. A termination suitable for EMC protection can be made using armoured cables with this gland.

Warning

Please read these instructions carefully. These products should not be used in applications except as detailed here or in our datasheets, unless confirmed in writing by Peppers. Peppers take no responsibility for any damage, injury or other consequential loss caused where products are not installed or used according to these instructions. This leaflet is not intended to advise on the selection of product. Further guidance can be found in the standards listed overleaf or the prevailing code of practice.

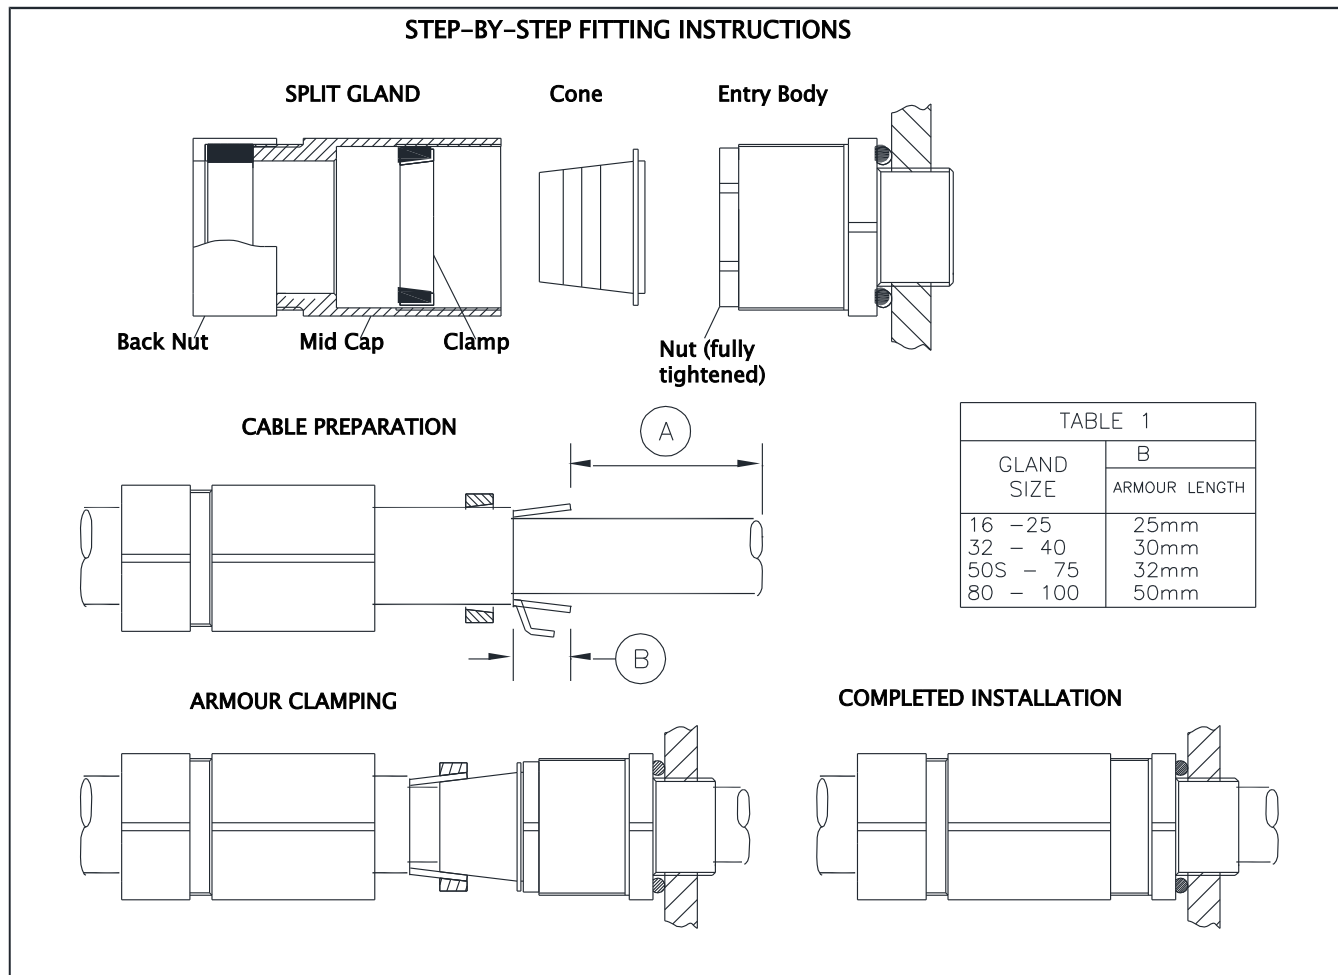

STEP-BY-STEP FITTING INSTRUCTIONS

- 1 Split gland as shown
- 2 Fit Entry Body, allowing for any installation accessories, and fully engage the thread into the equipment. Hand-tighten, then suitably secure with a wrench. Further guidance can be found in Peppers document CT0030 which can be found on our website.
- 3 Slide Back Nut, Mid Cap and Clamp (and shroud if required) onto cable as shown
- 4 **Prepare Cable**
 - A Strip outer jacket and armour, length to suit installation.
 - B Expose armour. For approximate lengths see Table 1 column B. Where sheath sizes are near minimum, form armour to facilitate clamping as shown.
- 5 Slide the Clamp over the exposed armour. Ensure the Clamp is in the correct orientation.
- 6 Slide Cone onto inner sheath and under armour. Slide Clamp onto exposed armour
- 7 Insert cable through Entry Body. Push cable forward to maintain armour contact.
- 8 To clamp armour/braid onto Cone, hand-tighten Mid Cap to Entry Body. Support the cable to prevent it from twisting then, using wrench, tighten a further 1 turn. Cable with maximum diameter wire armour may require an additional ½ to 1 turn.
- 9 Loosen off Mid Cap to visually check armour is securely locked. If armour has not clamped repeat the clamping process.
- 10 Re-tighten Mid Cap by hand until tight. For cable with wire armour turn Mid Cap a further 1 turn with a wrench. For cable with all other armour types turn Mid Cap a further ¼ turn with a wrench after hand tight.
- 11 Hold Mid Cap with wrench and tighten the Back Nut onto cable. Ensure the seal makes full contact with cable outer sheath and then tighten the back nut by the additional turns detailed in Table 2. If fitted, pull shroud over gland assembly.

CR-O* Cable Glands featuring CROCLOCK® – ASSEMBLY INSTRUCTIONS**

Table 2 - Installation Data, Cable Sizes and Armour Acceptance (mm)

Gland Size	Back Nut Turns – Step 11	Inner Sheath Max	Outer Sheath		Reduced Bore		Armour Acceptance Ranges	
			Min	Max	Min	Max	Min	Max
16	1	11.7	8.4	13.5	6.7	10.3	0.15	1.25
20S	1	11.7	11.5	16.0	9.4	12.5	0.15	1.25
20	1	14.0	15.5	21.1	12.0	17.6	0.15	1.25
25	1	20.0	20.3	27.4	16.8	23.9	0.15	1.6
32	2	26.3	26.7	34.0	23.2	30.5	0.15	2.0
40	1	32.2	33.0	40.6	28.6	36.2	0.2	2.0
50S	1	38.2	39.4	46.7	34.8	42.4	0.2	2.5
50H	2	38.2	45.7	53.2	41.1	48.5	0.3	2.5
50	2	44.1	45.7	53.2	41.1	48.5	0.3	2.5
63S	1	50.1	52.1	59.5	47.5	54.8	0.3	2.5
63H	1	50.1	58.4	65.8	53.8	61.2	0.3	2.5
63	1	56.0	58.4	65.8	53.8	61.2	0.3	2.5
75S	1	62.0	64.8	72.2	60.2	68.0	0.3	2.5
75H	1	62.0	71.1	78.0	66.5	73.4	0.3	2.5
75	1	68.0	71.1	78.0	66.5	73.4	0.3	2.5
80	1	72.0	77.0	84.0	71.9	79.4	0.45	3.15
85	1	78.0	79.6	90.0	75.0	85.4	0.45	3.15
90	3	84.0	88.0	96.0	82.0	91.4	0.45	3.15
100	1	90.0	92.0	102.0	87.4	97.4	0.45	3.15

Approvals and Certification

Approval	Certificate Number	Protection Concept / Type
ATEX (2014/34/EU) UKCA (SI 2016 No. 1107)	CML 19ATEX1348X CML 21UKEX1030X	Ex II 1D 2G Ex eb IIC Gb / Ex ta IIIC Da
IECEX	IECEX CML 19.0106X	Ex eb IIC Gb / Ex ta IIIC Da
CSA - Canada	1356011	Ex e IIC Gb / CL I Div 2 Gr ABCD / CL II Gr EFG / CL III Type 4X
CSA	1356011	Ex eb IIC Gb / Ex ta IIIC Da Class I Zone 1 AEx eb IIC Gb / Zone 20 AEx ta IIIC Da CL II Gr EFG / CL III Type 4X IP66
INMETRO	NCC 13.2185 X	Ex eb IIC Gb / Ex ta IIIC Da
EAC	RU C-GB.BH02.B.00693/18	1Ex e IIC Gb X / Ex ta IIIC Da X
UKRAINE	CL 18.0326 X	II 1D 2G Ex eb IIC Gb / Ex ta IIIC Da
CCC	2021312313000409	Ex e IIC Gb / Ex tD A20 IP66
Korea	15GA4BO-0671	Ex e IIC
CCoE / PESO	P494321/8	Ex eb IIC Gb / Ex ta IIIC Da
ABS	20-LD1944057-PDA	Specified ABS Rules – See certificate
Lloyd's Register	LR2124442TA	Ex eb IIC Gb / Ex ta IIIC Da
Russian Maritime	19.00189.278	Ex e IIC Gb / Ex ta IIIC Da

Installation Guidance

Point	Advice
1	BS/EN/IEC 60079-10 BS/EN/IEC 60079-14 National Electrical Code (NEC 500 – 505) Canadian Electrical Code (CSA C22.1)
2	Installation should only be carried out by a competent electrician, skilled in cable gland and appropriate electrical installations.
3	Comprehensive details of the compliance standards can be found in the product certificates which are available for download from our website.
4	NO INSTALLATION SHOULD BE CARRIED OUT UNDER LIVE CONDITIONS.
5	Threaded entries: the product can be installed directly into threaded entries. Threaded entries should comply with the relevant applicable standards and have a lead-in chamfer to allow for full engagement of the threads. Failure to provide a sufficient lead-in chamfer may lead to ingress sealing issues. Metric threads are supplied with an o-ring and will maintain IP66 and IP68. Other parallel entry threads will maintain an IP rating of IP64. A Peppers sealing washer should be used to maintain all IP ratings greater than IP64. Whilst Peppers products with tapered threads, when installed into a threaded entry, have been tested to maintain IP66 without any additional sealant, due to the differing gauging tolerances associated with the use of tapered threads it is recommended to use a non-hardening thread sealant if an IP rating higher than IP64 is required.
6	Clearance holes: these shall be no larger than 0.7mm above the nominal diameter of the external entry thread. The product should be secured with a Peppers locknut and the threads tightened to ensure the cable gland is secure. Where no integral sealing method is provided a Peppers sealing washer should be used to maintain IP ratings. A Peppers serrated washer should be used for additional installation protection. It is recommended that tapered threads are not used in clearance holes.
7	To maintain the Ingress Protection rating of the product, the entry hole must be perpendicular to the surface of the enclosure. The surface should be sufficiently flat and rigid to support the assembly and make the IP joint. The surface must be clean and dry. The product incorporates a thread run out according to general machining techniques and will not have a full form thread for the entire length and as such entry threads should have a suitable lead-in chamfer to ensure a seal is maintained. Further guidance can be found on Peppers website. It is the user's/installer's responsibility to ensure that the interface between the enclosure and cable gland is suitably sealed for the required application. Any thread sealant used shall be suitable for use in hazardous area locations, be suitable for the temperature range at the point of mounting, shall not contain evaporating solvent and cannot cause corrosion at the threaded interface when used for dissimilar materials.
8	Where a bonding connection to earth is required a Peppers earth tag should be used. Peppers earth tags have been independently tested to comply with the Category B values given in IEC 62444. Further guidance can be found on Peppers website. Peppers earth tags should be fitted over the external entry thread from either inside or outside the enclosure. If fitted internally they must be secured with a Peppers locknut and optionally a Peppers serrated washer.
9	Peppers external metric entry threads comply with ISO 965-1 and ISO 965-3 with a 6g tolerance fit. Peppers standard metric thread pitch is 1.5mm for threads up to M75 and 2.0mm for size M80 and above. Alternative thread pitches are available upon request. Peppers external NPT threads are in accordance with ASME B1.20.1 with gauging to clause 8.1. All threads comply with the threaded joint requirements of clause 5.3 from IEC 60079-1. Information on other thread types can be found in the product certificates.
10	Once installed do not dismantle except for routine inspection. An inspection should be conducted as per IEC/EN 60079-17. After inspection the gland should be re-assembled as instructed, ensuring the compression nut, mid cap and back nut are correctly tightened to ensure the cable is secure.
11	If required an anti-seize lubricant may be used to aid assembly and routine inspection. The lubricant should comply with the prevailing code of practice and care should be taken to ensure no lubricant comes into contact with the cable gland seals as this may impair performance.

Interpretation of Markings. Markings on the outside of this gland carry the following meanings:

Cable Gland Type & Size CR-0-a-b-R-ccc-ddd-nn

a =	Seal Type	1 = Neoprene (black)	3 = Silicone (white)	ccc =	Gland size
b =	Main component material	B = brass	S = stainless steel	ddd =	Entry thread type and size
R =	Optional reduced bore outer seal (red silicone)			nn =	Year of manufacture

Specific Conditions of Use

- These glands must not be used in enclosures where the temperature at the point of contact is outside the range of -35°C to +90°C using neoprene seals, or -60° to +180°C using silicone seals.
- When the gland is used with increased safety and/or dust protected equipment, the entry thread shall be suitable sealed to maintain the ingress protection rating of the associated enclosure.
- If these cable glands only grip the cable sheath of the cable and do not clamp the cable armour or if they are used to terminate unarmoured, braided or screened cables, then they shall only be used for fixed installations, hence the cables shall be effectively clamped to prevent pulling or twisting.
- These glands, when installed in accordance with the manufacturer's instructions and with an appropriate enclosure on which they are fixed, are capable of providing an ingress protection of IP66.
- The threaded entry component threads without interface o-ring seals installed in an explosive dust atmosphere, within threaded entries, shall only be fitted into enclosures that have either:
 - parallel entries that will ensure that a minimum of 5 full threads of contact will be maintained, this is in accordance with clause 5.1.2 of EN 60079-31:2014 / IEC 60079-31: 2013,
 - tapered entries that will ensure that a minimum of 3 ½ full threads of contact will be maintained, this is in accordance with clause 5.1.2 of EN 60079-31:2014 / IEC 60079-31: 2013.