

# Single Seal Barrier Gland for Unarmoured Cable featuring Peppers T-1000 Compound

Ex db : Ex eb : Ex nR : Ex ta : IP66 : IP68 : Class I Div 2 : AEx db : AEx eb : AEx ta



## PRODUCT TYPE CR-X



### PRODUCT DESCRIPTION

"CR-X" type glands, approved for use with any shape cable, are certified Flameproof Ex db, Increased Safety Ex eb, Restricted Breathing Ex nR and Dust Protected Ex ta. They are suitable for use in Group I Mining, Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dust Groups IIIA, IIIB and IIIC. Also certified for Zone and Division installations under CEC and NEC. Occasionally referred to as "potting glands", they provide a compound barrier Ex db & IP seal on the cable inner cores (or flying leads), eliminating damage to cables that exhibit "cold flow" characteristics. The unique features include Peppers T-1000, the sealing compound that enables a quick and easy installation and an innovative barrier chamber that allows for a full inspection of the compound fill. The gland maintains IP66 & IP68 to 100 metres and is deluge proof without the use of an additional seal or deluge boot. It is supplied with an IP O-ring seal as standard on metric entry threads.

### COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-15, EN 60079-31  
IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-15, IEC 60079-31 & IEC 60529  
C22.2 (see certificate), CAN/CSA 60079-0/1/7/31  
UL514B, UL1203, UL2225, UL50E, ANSI/UL 60079-0/1/7, ISA 60079-31

### CERTIFICATION:

<b>UKEX</b>	I M2 II 1D 2G Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
<b>ATEX</b>	I M2 II 1D 2G Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
<b>IECEX</b>	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
<b>CEC - Canada</b>	Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIIC Da Class I Division 2 Groups A, B, C & D Class II Groups E, F & G Class III, Type 4X
<b>NEC - USA</b>	Class I Division 2 Groups A, B, C & D Class II Groups E, F & G Class I Zone 1 AEx db IIC Gb / AEx eb IIC Gb / Zone 20 AEx ta IIIC Da Class III, Type 4X
<b>EAC</b>	PB Ex db I Mb X / 1 Ex db IIC Gb X / PB Ex eb I Mb x / 1 Ex eb IIC Gb X / 2 Ex nR IIC Gc X Ex ta IIIC Da X
<b>INMETRO - Brazil</b>	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
<b>CCC - China</b>	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
<b>UKRAINE</b>	I M2 Ex db I Mb / II 2G Ex db IIC Gb / II 2G Ex eb I Mb / II 2G Ex eb IIC Gb II 3G Ex nR IIC Gc / II 1D Ex ta IIIC Da
<b>CCoE - India</b>	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
<b>ECAS-Ex</b>	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
<b>ABS</b>	Specified ABS Rules
<b>LLOYD'S</b>	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
<b>DNV</b>	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da

### CERTIFICATION No.:


<b>UKEX</b>	CML 21UKEX1031X & CML 21UKEX4037X
<b>ATEX</b>	CML 19ATEX1344X & CML 19ATEX4114X
<b>IECEX</b>	IECEX CML 19.0046X
<b>CEC - Canada</b>	CSA 1356011
<b>NEC - USA</b>	CSA 1356011
<b>EAC</b>	RU C-GB.AK58.B.05106/24
<b>INMETRO - Brazil</b>	NCC 13.2188 X
<b>CCC - China</b>	2021312313000407
<b>UKRAINE</b>	CLJ 18.0322 X
<b>CCoE - India</b>	PESO P494321/18 & P494321/20
<b>ECAS-Ex</b>	25-06-153223/E25-06-159811/NB0007
<b>ABS</b>	25-01581110-PDA
<b>LLOYD'S</b>	LR2124442TA
<b>DNV</b>	TAE00004XK

### CABLE GLAND SELECTION TABLE (ALL DIMENSIONS IN mm)

Gland size	Entry Thread Size		Metric Thread Length [B]	Gland Seal Range - Cable Sheath & Cores			Nominal Protrusion Length [L] Metric	Dimensions/Weight (Metric)			Shroud Size (Metric)
	Metric	NPT		Max Number of cores [C]	Max Ø Over Cores [C]	Max Outer Sheath [D]		Across Flats [A]	Across Corners	Weight (Kgs)	
20S	M20 x 1.5	1/2" or 3/4"	16	35	10.4	11.7	42	25.4	28.0	0.126	L24*
20	M20 x 1.5	1/2" or 3/4"	16	40	12.5	14.0	44	30.0	33.0	0.167	L30
25	M25 x 1.5	3/4" or 1"	16	60	17.8	20.0	48	37.6	41.4	0.260	L38
32	M32 x 1.5	1" or 1 1/4"	16	80	23.5	26.3	53	46.0	50.6	0.396	L46
40	M40 x 1.5	1 1/4" or 1 1/2"	16	130	28.8	32.2	54	55.0	60.5	0.600	L55
50	M50 x 1.5	2"	16	400	39.4	44.1	54	65.0	71.5	0.710	L65
63	M63 x 1.5	2 1/2"	19	425	50.0	56.0	55	80.0	88.0	1.054	L86
75	M75 x 1.5	3"	19	425	60.8	68.0	60	90.0	99.0	1.318	L99
80	M80 x 2.0	3" or 3 1/2"	25	425	64.4	72.0	80	104.0	115.2	2.734	L104
85	M85 x 2.0	3" or 3 1/2"	25	425	69.8	78.0	80	104.0	115.2	2.282	L104
90	M90 x 2.0	3 1/2" or 4"	25	425	75.1	84.0	85	114.0	125.7	2.854	L114
100	M100 x 2.0	3 1/2" or 4"	25	425	80.5	90.0	85	114.0	125.7	2.453	L114

### NOTES

- Gland size does not necessarily equate to the entry thread size.
- The IP O-ring seal is only available on metric entry threads. IP washers can be supplied for tapered entry threads.
- Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supply products with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. We usually incorporate a thread run out according to general machining techniques and parts will not have a full form

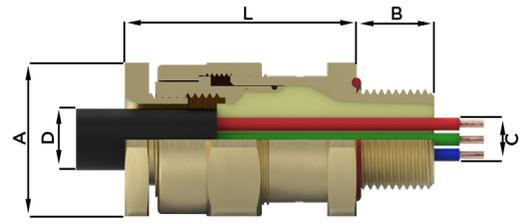

### EXAMPLE PART NUMBERING: CR-XB/NP/20/M20

<b>CR-X</b>	Peppers T-1000 Compound (Barrier) Gland designed for use with unarmoured cable
<b>2</b>	For use with Lead Sheath Cables
<b>B</b>	Brass (B) / Stainless Steel (S)
<b>C</b>	PVC Shroud (C) - PCP Shroud (P) - Silicone LSOH Shroud (3)
<b>K-V-H</b>	Locknut, & Nylon (K), Fibre (V) or PTFE (H) IP Washer
<b>T</b>	Including Earth Tag
<b>S</b>	Including Serrated Washer
<b>1</b>	Quantity per kit
<b>NP</b>	Nickel Plated
<b>20</b>	Gland shell size
<b>M20</b>	M20 x 1.5 Male Entry Thread

### OPTIONAL ACCESSORIES:

<b>LOCKNUT (L)</b>	Brass (ACBLN) / Stainless Steel (ACSLN)
<b>EARTH TAG (T)</b>	Brass (ACBET) / Stainless Steel (ACSET)
<b>IP WASHERS</b>	Nylon (N) / Fibre (J) / PTFE (Z)
<b>SERRATED WASHERS</b>	Stainless Steel (S)
<b>SHROUDS</b>	PVC (C) / PCP (P) / Silicone LSOH (3)

<b>IP RATING:</b>	IP66 & IP68 (100 metres - 7 Days), Type 4X & DTS01:1991
<b>OPERATING TEMP:</b>	-60°C to +135°C
<b>MATERIALS:</b>	Brass or Stainless Steel
<b>PLATING:</b>	Electroless Nickel
<b>COMPOUND:</b>	Peppers T-1000 Sealing Compound

**CURING TIME:**  
@ 21°C Conductor termination can be effected after 1 hour. Compound chamber can be fully inspected after 4 hours and the equipment then energised.

- thread for the entire length. Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.
- When selecting IP Washer & Shroud material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- The gland is supplied with the correct amount of the two-part compound, gloves and instructions to allow one complete termination.
- Where approval in addition to UKEX, ATEX, IECEX and CSA is required, this must be clearly requested at time of enquiry / order.
- \* For gland size 16 and 20S when used with 3/4" NPT entry thread an L30 shroud would be required.