

Double Compression Gland for Armoured Flat Cable featuring a Female Conduit Connection

Ex db : Ex eb : Ex nR : Ex ta : IP66 : IP68 : Class I Zone 1 : AEx eb : AEx ta



PRODUCT DESCRIPTION


"E8XCF" type glands are certified Flameproof Ex db, Increased Safety Ex eb, Restricted Breathing Ex nR and Dust Protected Ex ta. They are suitable for use in Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dust Groups IIIA, IIIB and IIIC. Also certified for Zone and Division installations for use with Marine Shipboard and Tray Cables under the NEC and CEC. Developed for flat cables, they provide controlled Ex db sealing and have been tested to IP66 and IP68 to 50 metres. The "E8XCF" version is designed to accommodate armoured cables, sealing on the inner and outer sheaths and also incorporates a detachable armour specific clamping system. The gland features a female conduit connection thread as standard. A termination suitable for EMC protection can be made using armoured cables with these glands.

COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-15, EN 60079-31
IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31 & IEC 60529
C22.2 (see certificate), CAN/CSA 60079-0/1/7/31
UL514B, UL1203, UL2225, UL50E, ANSI/UL 60079-0/7, ISA 60079-31

CERTIFICATION:	UKEX	II 1D 2G Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
	ATEX	II 1D 2G Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
	IECEX	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	CEC - Canada	Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIIC Da Class II Group E, F & G Class III Type 4X
	NEC - USA	Class I Zone 1 AEx eb IIC Gb / Zone 20 AEx ta IIIC Da Class II Group E, F & G Class III Type 4X
	EAC	1Ex db IIC Gb X / 1Ex eb IIC Gb X / 2Ex nR IIC Gc X / Ex ta IIIC Da X
	INMETRO - Brazil	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	CCC - China	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	UKRAINE	II 2G Ex db IIC Gb / II 2G Ex eb IIC Gb / II 3G Ex nR IIC Gc / II 1D Ex ta IIIC Da
	CCoE - India	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
CERTIFICATION No:	ECAS-Ex	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	ABS	Specified ABS Rules
	LLOYD'S	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	DNV	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	UKEX	CML 21UKEX1033X & CML 21UKEX4043X
	ATEX	CML 19ATEX1346X & CML 19ATEX4109X
	IECEX	IECEX CML 19.0104X
	CEC - Canada	CSA 1356011
	NEC - USA	CSA 1356011
	EAC	RU C-GB.AX58.B.05106/24
CABLE GLAND SELECTION TABLE (ALL DIMENSIONS IN mm)	INMETRO - Brazil	NCC 13.2187 X
	CCC - China	2021312313000447
	UKRAINE	CL 18.0321 X
	CCoE - India	PESO P494321/7 & P494321/13
	ECAS-Ex	25-06-153223/E25-06-159811/NB0007
	ABS	25-0158110-PDA
	LLOYD'S	LR2124442TA
	DNV	TAE00004XK

PRODUCT TYPE E8XCF

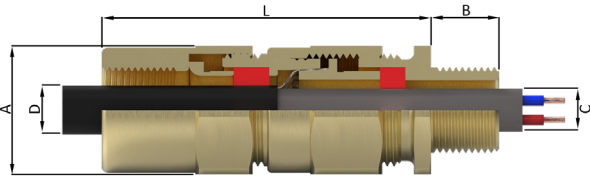

EXAMPLE PART NUMBERING:
E8XCFB050NPT/M20/M20

OPTIONS	E	Gland designed for use with Armoured Cables
	8	Silicone Seal for flat cables
	X	Detachable Clamping for Braid Armour
	CF	Female Conduit Connection Thread
	B	Brass (B) / Stainless Steel (S)
	F	Multiple Certification
	K-V-H	Locknut, Earth Tag & Nylon (K), Fibre (V) or PTFE (H) IP Washer
	S	Including Serrated Washer
	1	Quantity per kit
	050NPT	1/2"NPT Female Conduit Connection Thread
OPTIONAL ACCESSORIES:	NP	Nickel Plated
	20	Gland shell size
	M20	M20 x 1.5 Male Entry Thread

LOCKNUT (L)	Brass (ACBLN) / Stainless Steel (ACSLN)
EARTH TAG (T)	Brass (ACBET) / Stainless Steel (ACSET)
IP WASHERS	Nylon (N) / Fibre (J) / PTFE (Z)
SERRATED WASHERS	Stainless Steel (S)

IP RATING:	IP66 & IP68 (50 metres - 7 Days), Type 4X
OPERATING TEMP:	Silicone Seals -60°C to +180°C
MATERIALS:	Brass or Stainless Steel
PLATING:	Electroless Nickel

- NOTES
- Gland size does not necessarily equate to the entry thread size.
 - Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
 - Assembly instructions must be read prior to installation and adhered to in full.
 - Peppers supply products with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. We usually incorporate a thread run out according to general machining techniques and parts will not have a full form thread for the entire length. Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.

- When selecting IP Washer & Shroud material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- Where approval in addition to UKEX, ATEX, IECEx and CSA is required, this must be clearly requested at time of enquiry / order.