

Single Seal Barrier Gland for Unarmoured Cable featuring Peppers T-1000 Compound

Ex db : Ex eb : Ex nR : Ex ta : IP66 : IP68 : Class I Div 2 : AEx db : AEx eb : AEx ta



PRODUCT DESCRIPTION

"CR-X" type glands, approved for use with any shape cable, are certified Flameproof Ex db, Increased Safety Ex eb, Restricted Breathing Ex nR and Dust Protected Ex ta. They are suitable for use in Group I Mining, Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dust Groups IIIA, IIIB and IIIC. Also certified for Zone and Division installations under CEC and NEC. Occasionally referred to as "potting glands", they provide a compound barrier Ex db & IP seal on the cable inner cores (or flying leads), eliminating damage to cables that exhibit "cold flow" characteristics. The unique features include Peppers T-1000, the sealing compound that enables a quick and easy installation and an innovative barrier chamber that allows for a full inspection of the compound fill. The gland maintains IP66 & IP68 to 100 metres and is deluge proof without the use of an additional seal or deluge boot. It is supplied with an IP O-ring seal as standard on metric entry threads.

COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-15, EN 60079-31
IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-15, IEC 60079-31 & IEC 60529
C22.2 (see certificate), CAN/CSA 60079-0/1/7/31
UL514B, UL1203, UL2225, UL50E , ANSI/UL 60079-0/1/7, ISA 60079-31

CERTIFICATION:	UKEX	I M2 II 1D 2G Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
	ATEX	I M2 II 1D 2G Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
	IECEX	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	CEC - Canada	Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIIC Da Class I Division 2 Groups A, B, C & D Class II Groups E, F & G Class III, Type 4X
	NEC - USA	Class I Division 2 Groups A, B, C & D Class II Groups E, F & G Class I Zone 1 AEx db IIC Gb / AEx eb IIC Gb / Zone 20 AEx ta IIIC Da Class III, Type 4X
	EAC	PB Ex db I Mb X / 1Ex db IIC Gb X / PB Ex eb I Mb x / 1Ex eb IIC Gb X / 2Ex nR IIC Gc X Ex ta IIIC Da X
	INMETRO - Brazil	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	CCC - China	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	UKRAINE	I M2 Ex db I Mb / II 2G Ex db IIC Gb / II 2G Ex eb I Mb / II 2G Ex eb IIC Gb II 3G Ex nR IIC Gc / II 1D Ex ta IIIC Da
	CCoE - India	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da


CERTIFICATION No:	UKEX	CML 21UKEX1031X & CML 21UKEX4037X
	ATEX	CML 19ATEX1344X & CML 19ATEX4114X
	IECEX	IECEX CML 19.0046X
	CEC - Canada	CSA 1356011
	NEC - USA	CSA 1356011
	EAC	RU C-GB.AK58.B.05106/24
	INMETRO - Brazil	NCC 13.2188 X
	CCC - China	2021312313000407
	UKRAINE	CLJ 18.0322 X
	CCoE - India	PESO P494321/18 & P494321/20

CABLE GLAND SELECTION TABLE (ALL DIMENSIONS IN mm)	ECAS-Ex - U.A.E	25-06-153223/E25-06-159811/NB0007
	ABS	25-0158110-PDA
	LLOYD'S	LR25189453TA
	DNV	TAE00004XK

UKEX	CML 21UKEX1031X & CML 21UKEX4037X
ATEX	CML 19ATEX1344X & CML 19ATEX4114X
IECEX	IECEX CML 19.0046X
CEC - Canada	CSA 1356011
NEC - USA	CSA 1356011
EAC	RU C-GB.AK58.B.05106/24
INMETRO - Brazil	NCC 13.2188 X
CCC - China	2021312313000407
UKRAINE	CLJ 18.0322 X
CCoE - India	PESO P494321/18 & P494321/20
ECAS-Ex - U.A.E	25-06-153223/E25-06-159811/NB0007
ABS	25-0158110-PDA
LLOYD'S	LR25189453TA
DNV	TAE00004XK

CABLE GLAND SELECTION TABLE
(ALL DIMENSIONS IN mm)

- NOTES
- Gland size does not necessarily equate to the entry thread size.
 - The IP O-ring seal is only available on metric entry threads. IP washers can be supplied for tapered entry threads.
 - Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
 - Assembly instructions must be read prior to installation and adhered to in full.
 - Peppers supply products with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. We usually incorporate a thread run out according to general machining techniques and parts will not have a full form

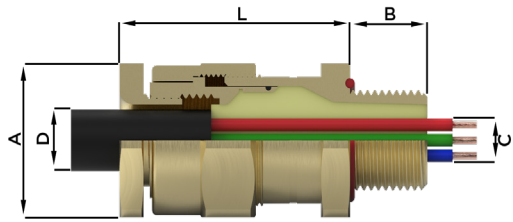

EXAMPLE PART NUMBERING:
CR-XB/NP/20/M20

CR-X	Peppers T-1000 Compound (Barrier) Gland designed for use with unarmoured cable
2	For use with Lead Sheath Cables
B	Brass (B) / Stainless Steel (S)
C	PVC Shroud (C) - LSOH Silicone Shroud (3)
K-V-H	Locknut, & Nylon (K), Fibre (V) or PTFE (H) IP Washer
T	Including Earth Tag
S	Including Serrated Washer
1	Quantity per kit
NP	Nickel Plated
20	Gland shell size
M20	M20 x 1.5 Male Entry Thread

OPTIONAL ACCESSORIES:

LOCKNUT (L)	Brass (ACBLN) / Stainless Steel (ACSLN)
EARTH TAG (T)	Brass (ACBET) / Stainless Steel (ACSET)
IP WASHERS	Nylon (N) / Fibre (J) / PTFE (Z)
SERRATED WASHERS	Stainless Steel (S)
SHROUDS	PVC (C) / LSOH Silicone (3)

IP RATING:	IP66 & IP68 (100 metres - 7 Days), Type 4X & DTS01:1991
OPERATING TEMP:	-60°C to +135°C
MATERIALS:	Brass or Stainless Steel
PLATING:	Electroless Nickel
COMPOUND:	Peppers T-1000 Sealing Compound

CURING TIME:
@ 21°C Conductor termination can be effected after 1 hour. Compound chamber can be fully inspected after 4 hours and the equipment then energised.

Gland size	Entry Thread Size		Metric Thread Length [B]	Gland Seal Range - Cable Sheath & Cores			Nominal Protrusion Length [L] Metric	Dimensions/Weight (Metric)			Shroud Size (Metric)
	Metric	NPT		Max Number of cores [C]	Max Ø Over Cores [C]	Max Outer Sheath [D]		Across Flats [A]	Across Corners	Weight (Kgs)	
20S	M20 x 1.5	1/2" or 3/4"	16	35	10.4	11.7	42	25.4	28.0	0.126	L24*
20	M20 x 1.5	1/2" or 3/4"	16	40	12.5	14.0	44	30.0	33.0	0.167	L30
25	M25 x 1.5	3/4" or 1"	16	60	17.8	20.0	48	37.6	41.4	0.260	L38
32	M32 x 1.5	1" or 1 1/4"	16	80	23.5	26.3	53	46.0	50.6	0.396	L46
40	M40 x 1.5	1 1/4" or 1 1/2"	16	130	28.8	32.2	54	55.0	60.5	0.600	L55
50	M50 x 1.5	2"	16	400	39.4	44.1	54	65.0	71.5	0.710	L65
63	M63 x 1.5	2 1/2"	19	425	50.0	56.0	55	80.0	88.0	1.054	L86
75	M75 x 1.5	3"	19	425	60.8	68.0	60	90.0	99.0	1.318	L99
80	M80 x 2.0	3" or 3 1/2"	25	425	64.4	72.0	80	104.0	115.2	2.734	L104
85	M85 x 2.0	3" or 3 1/2"	25	425	69.8	78.0	80	104.0	115.2	2.282	L104
90	M90 x 2.0	3 1/2" or 4"	25	425	75.1	84.0	85	114.0	125.7	2.854	L114
100	M100 x 2.0	3 1/2" or 4"	25	425	80.5	90.0	85	114.0	125.7	2.453	L114

- thread for the entire length. Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.
- When selecting IP Washer & Shroud material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
 - The gland is supplied with the correct amount of the two-part compound, gloves and instructions to allow one complete termination.
 - Where approval in addition to UKEX, ATEX, IECEx and CSA is required, this must be clearly requested at time of enquiry / order.
 - * For gland size 16 and 20S when used with 3/4" NPT entry thread an L30 shroud would be required.