

Metallic Breather Drain

Ex eb : Ex ta IP66 : AEx eb : AEx ta



PRODUCT DESCRIPTION
"ACDP" Series Breather Drains allow the inside of the equipment to breathe with the outside atmosphere and provide a method of effectively draining any moisture from within the equipment. ACDP series Breather Drains maintain Ex eb method of protection and IP66 for IEC type applications. A Castellated Locknut and O-ring is supplied with every Breather Drain.

COMPLIANCE STANDARDS:
EN 60079-0, EN 60079-7, EN 60079-31
IEC 60079-0, IEC 60079-7, IEC 60079-31 & 60529
C22.2 (see certificate), UL 514B, ANSI/UL 60079-0, UL 60079-7, UL 60079-31, UL 50E


CERTIFICATION:	UKEX	I M2 II 1D 2G Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	ATEX	I M2 II 1D 2G Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	IECEX	Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	UL	Class I Zone 1 AEx eb IIC Gb / Zone 20 AEx ta IIIC Da
	CEC - Canada	Ex eb IIC / Ex ta IIIC
	NEC - USA	Class I Zone 1 AEx eb IIC Gb / Zone 20 AEx ta IIIC Da
	EAC	PB Ex eb I Mb X / 1Ex eb IIC Gb X / Ex ta IIIC Da X
	INMETRO - Brazil	Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	CoC - China	Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	UKRAINE	I M2 Ex eb I Mb / II 2G Ex eb IIC Gb / II 1D Ex ta IIIC Da
CERTIFICATION NO.:	CCoE - India	Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	ECAS-Ex	Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	ABS	Specified ABS Rules
	LLOYD'S	Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	DNV	Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	UKEX	CML 21UKEX3029X
	ATEX	CML 19ATEX3347X
	IECEX	IECEX CML 19.0105X
	UL	E340660
	CEC - Canada	CSA 2310046

CERTIFICATION NO.:	UKEX	CML 21UKEX3029X
	ATEX	CML 19ATEX3347X
	IECEX	IECEX CML 19.0105X
	UL	E340660
	CEC - Canada	CSA 2310046
	NEC - USA	CSA 2310046
	EAC	RU C-GB.AXK58.B.05106/24
	INMETRO - Brazil	NCC 13.2191 X
	CoC - China	CNEX21.5374X
	UKRAINE	CLJ 18.0319 X
CERTIFICATION NO.:	CCoE - India	PESO P365300/8
	ECAS-Ex	25-06-153223/E25-06-159811/NB0007
	ABS	25-0158110-PDA
	LLOYD'S	LR2124442TA
	DNV	TAE00004XK
	UKEX	CML 21UKEX3029X
	ATEX	CML 19ATEX3347X
	IECEX	IECEX CML 19.0105X
	UL	E340660
	CEC - Canada	CSA 2310046

BREATHING DRAIN SELECTION TABLE (ALL DIMENSIONS IN mm)	Thread Size	A/F [A]	A/C	Length [B]	Length [L]	Weight (Kgs)
	M12 x 1.5	19.0	20.9	10 or 15	12.0	0.032
	M16 x 1.5	24.0	26.4	10 or 15	12.0	0.052
	M20 x 1.5	27.0	29.7	10 or 15	12.0	0.065
	M25 x 1.5	31.8	34.9	10 or 15	12.0	0.097
	M32 x 1.5	37.6	41.3	10 or 15	12.0	0.107
	1/2" NPT	28.6	31.4	15	12.0	0.075
	3/4" NPT	33.0	36.3	15	12.0	0.107

- NOTES
- Assembly instructions must be read prior to installation and adhered to in full.
 - All Breather Drains are supplied with Castellated locknut as standard.
 - The standard O-ring material is nitrile. Other options are available upon request.
 - Aluminium versions are not suitable for Group I Mining application.
 - The ACDP flow rate was obtained from testing in an empty enclosure filled with water. The enclosure had no heat or pressure producing equipment inside. Flow rates in the field may vary depending on operational parameters and surrounding environmental conditions.
 - To maintain the specified IP rating, clearance holes must be in accordance with EN 62444 and the entry device should be suitably secured.

PRODUCT TYPE ACDP

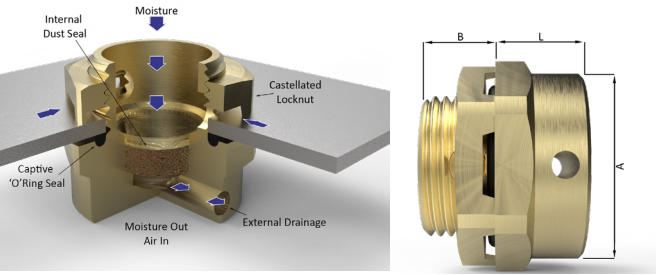

EXAMPLE PART NUMBERING: ACDP1BE/NP/M20/10	ACDP	Breather Drain c/w Castellated Locknut
	1	No IP O-ring (O) - Nitrile (1) - Silicone (3)
	B	Brass (B) - Stainless Steel (S) - Aluminium (A)
	E	Multiple Certification
	NP	Nickel Plated
	M20	Male Entry Thread
	10	Entry Thread Length 10mm or 15mm
	X	No Castellated Locknut (X) - Stainless Steel Sinter (S)

IP RATING:	IP66
OPERATING TEMPERATURE:	O-ring - None -100°C to +400°C
	O-ring - Nitrile -30°C to +100°C
	O-ring - Silicone -60°C to +200°C
MATERIALS:	Brass, Stainless Steel or Aluminium
PLATING:	Electroless Nickel
FLOW RATE:	0.25 Litres per Hour

- Peppers supply products with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. We usually incorporate a thread run out according to the general machining techniques and will not have a full form thread for the entire length. Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.
- Where approval in addition to UKEX, ATEX, IECEx, UL and CSA is required, this must be clearly requested at time of enquiry / order.