

# Single Compression Gland for Armoured Cable featuring Peppers MAC™

Ex eb : Ex ta : IP66 : Class I Zone 1 : AEx eb : AEx ta




PRODUCT TYPE C\*U



## PRODUCT DESCRIPTION

"C\*U" type single compression glands are certified Increased Safety Ex eb and Dust Protected Ex ta. They are suitable for use in Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dust Groups IIIA, IIIB and IIIC. Also certified for Zone and Division installations for use with Marine Shipboard and Tray Cables under the NEC and CEC. The gland is suitable for cables that exhibit "cold flow" characteristics, whilst providing an IP66 environmental seal on the cable outer sheath and Peppers multi-armour clamping system for wire, braid and tape armoured cables. The "IE" version allows the gland to be used with HV cables where the fault load is greater than 10.4kA and options are available for use with LSOH cables and extreme temperature applications.

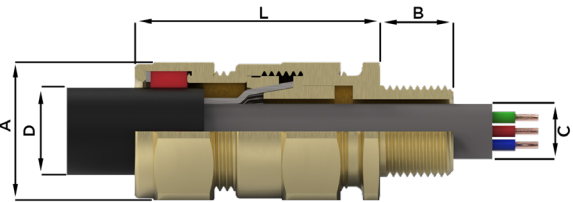

## COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-7, EN 60079-31  
IEC 60079-0, IEC 60079-7, IEC 60079-31 & IEC 60529  
C22.2 (see certificate), CAN/CSA 60079-0/7/31  
UL514B, UL1203, UL2225, UL50E, ANSI/UL 60079-0/7, ISA 60079-31

CERTIFICATION No:

<b>UKEX</b>	II 1D 2G Ex eb IIC Gb / Ex ta IIIC Da
<b>ATEX</b>	II 1D 2G Ex eb IIC Gb / Ex ta IIIC Da
<b>IECEX</b>	Ex eb IIC Gb / Ex ta IIIC Da
<b>CEC - Canada</b>	Ex eb IIC Gb / Ex ta IIIC Da Class II Group E, F & G Class III Type 4X
<b>NEC - USA</b>	Class I Zone 1 AEx eb IIC Gb / Zone 20 AEx ta IIIC Da Class II Group E, F & G Class III Type 4X
<b>EAC</b>	1Ex eb IIC Gb X / Ex ta IIIC Da X
<b>INMETRO - Brazil</b>	Ex eb IIC Gb / Ex ta IIIC Da
<b>CCC - China</b>	Ex eb IIC Gb / Ex ta IIIC Da
<b>CCoE - India</b>	Ex eb IIC Gb / Ex ta IIIC Da
<b>ECAS-Ex - U.A.E</b>	Ex eb IIC Gb / Ex ta IIIC Da
<b>ABS</b>	Specified ABS Rules
<b>LLOYD'S</b>	Ex eb IIC Gb / Ex ta IIIC Da
<b>DNV</b>	Ex eb IIC Gb / Ex ta IIIC Da

CERTIFICATION No:

<b>UKEX</b>	CML 21UKEX1035X
<b>ATEX</b>	CML 19ATEX1106X
<b>IECEX</b>	IECEX CML 19.0031X
<b>CEC - Canada</b>	CSA 1356011
<b>NEC - USA</b>	CSA 1356011
<b>EAC</b>	RU C-GB.AK58.B.05106/24
<b>INMETRO - Brazil</b>	NCC 13.2186 X
<b>CCC - China</b>	2021312313000406
<b>CCoE - India</b>	PESO P494321/4
<b>ECAS-Ex - U.A.E</b>	25-06-153223/E25-06-159811/NB0007
<b>ABS</b>	25-0158110-PDA
<b>LLOYD'S</b>	LR25189453TA
<b>DNV</b>	TAE00004XK

CABLE GLAND SELECTION TABLE (ALL DIMENSIONS IN mm)

Gland size	Entry Thread Size		Metric Thread Length [B]	Cable Acceptance Details						Armour Acceptance Range		Nominal Protrusion Length [L]	Dimensions/Weight (Metric)			Shroud Size* (Metric)
	Metric	NPT		Inner Sheath [C]		Outer Sheath [D]		Reduced [D]		Orientation 1	Orientation 2		Across Flats [A]	Across Corners	Weight Kgs	
				Min	Max	Min	Max	Min	Max							
16	M16 x 1.5	3/8" or 1/2"	16	N/A	8.4	8.4	13.5	4.9	10.0	0.80-1.25	0.20-0.80	58	24.0	26.5	0.143	L24*
16	M20 x 1.5	1/2" or 3/4"	16	N/A	8.4	8.4	13.5	4.9	10.0	0.80-1.25	0.20-0.80	58	24.0	26.5	0.154	L24*
20S	M20 x 1.5	1/2" or 3/4"	16	N/A	11.7	11.5	16.0	9.4	12.5	0.80-1.25	0.20-0.80	58	24.0	26.5	0.125	L24*
20	M20 x 1.5	1/2" or 3/4"	16	N/A	14.0	15.5	21.1	12.0	17.6	0.80-1.25	0.20-0.80	58	30.0	33.0	0.180	L30
25	M25 x 1.5	3/4" or 1"	16	N/A	20.0	20.3	27.4	16.8	23.9	1.25-1.60	0.20-0.80	58	37.6	41.4	0.256	L38
32	M32 x 1.5	1" or 1 1/4"	16	N/A	26.3	26.7	34.0	23.2	30.5	1.60-2.00	0.30-1.20	65	46.0	50.6	0.400	L46
40	M40 x 1.5	1 1/4" or 1 1/2"	16	N/A	32.2	33.0	40.6	28.6	36.2	1.60-2.00	0.30-1.20	72	55.0	60.5	0.649	L55
50S	M50 x 1.5	1 1/2" or 2"	16	N/A	38.2	39.4	46.7	34.8	42.4	2.00-2.50	0.30-1.60	73	65.0	71.5	0.940	L65
50H	M50 x 1.5	1 1/2" or 2"	16	N/A	38.2	45.7	53.2	41.1	48.5	2.00-2.50	0.30-1.60	73	65.0	71.5	0.849	L65
50	M50 x 1.5	2"	16	N/A	44.1	45.7	53.2	41.1	48.5	2.00-2.50	0.30-1.60	73	65.0	71.5	0.707	L65
63S	M63 x 1.5	2" or 2 1/2"	19	N/A	50.1	52.1	59.5	47.5	54.8	2.00-2.50	0.30-1.60	76	80.0	88.0	1.369	L80
63H	M63 x 1.5	2" or 2 1/2"	19	N/A	50.1	58.4	65.8	53.8	61.2	2.00-2.50	0.30-1.60	76	80.0	88.0	1.306	L80
63	M63 x 1.5	2 1/2"	19	N/A	56.0	58.4	65.8	53.8	61.2	2.00-2.50	0.30-1.60	76	80.0	88.0	1.123	L80
75S	M75 x 1.5	2 1/2" or 3"	19	N/A	62.0	64.8	72.2	60.2	68.0	2.00-2.50	0.50-1.60	82	90.0	99.0	1.661	L90
75H	M75 x 1.5	2 1/2" or 3"	19	N/A	62.0	71.1	78.0	66.5	73.4	2.00-2.50	0.50-1.60	82	90.0	99.0	1.553	L90
75	M75 x 1.5	3"	19	N/A	68.0	71.1	78.0	66.5	73.4	2.00-2.50	0.50-1.60	82	90.0	99.0	1.310	L90
80	M80 x 2.0	3" or 3 1/2"	25	N/A	72.0	77.0	84.0	71.9	79.4	3.15-4.00	0.50-1.60	110	104.0	115.2	2.718	L104
80H	M80 x 2.0	3" or 3 1/2"	25	N/A	72.0	79.6	90.0	75.0	85.4	3.15-4.00	0.50-1.60	110	104.0	115.2	2.489	L104
85	M85 x 2.0	3" or 3 1/2"	25	N/A	78.0	79.6	90.0	75.0	85.4	3.15-4.00	0.50-1.60	110	104.0	115.2	2.326	L104
90	M90 x 2.0	3 1/2" or 4"	25	N/A	84.0	88.0	96.0	82.0	91.4	3.15-4.00	0.50-1.60	110	114.0	125.7	2.852	L114
90H	M90 x 2.0	3 1/2" or 4"	25	N/A	84.0	92.0	102.0	87.4	97.4	3.15-4.00	0.50-1.60	110	114.0	125.7	2.629	L114
100	M100 x 2.0	3 1/2" or 4"	25	N/A	90.0	92.0	102.0	87.4	97.4	3.15-4.00	0.50-1.60	110	114.0	125.7	2.496	L114

NOTES

- Gland size does not necessarily equate to the entry thread size.
- Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supplies cable glands with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. We usually incorporate a thread run out according to general machining techniques and parts will not have a full form thread for the entire length. Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.

EXAMPLE PART NUMBERING: CU16E20R1C

<b>C</b>	Gland featuring Peppers Multi-armour clamping system
<b>1</b>	Neoprene Seal (1) - Silicone Seal (3)
<b>U</b>	SWA / AWA / SWB or STA
<b>B</b>	Brass (B) / Stainless Steel (S)
<b>IE</b>	Integral Earth (see page 82)
<b>E</b>	Ex e & Ex ta Certification
<b>R</b>	Reduced Bore Seal
<b>C</b>	PVC Shroud (C) - LSOH Silicone Shroud (3)
<b>K-V-H</b>	Locknut, Earth Tag & Nylon (K), Fibre (V) or PTFE (H) IP Washer
<b>S</b>	Including Serrated Washer
<b>1</b>	Quantity per kit
<b>NP</b>	Nickel Plated
<b>20</b>	Gland shell size
<b>050NPT</b>	1/2"NPT Male Entry Thread

OPTIONAL ACCESSORIES:

<b>LOCKNUT (L)</b>	Brass (ACBLN) / Stainless Steel (ACSLN)
<b>EARTH TAG (T)</b>	Brass (ACBET) / Stainless Steel (ACSET)
<b>IP WASHERS</b>	Nylon (N) / Fibre (J) / PTFE (Z)
<b>SERRATED WASHERS</b>	Stainless Steel (S)
<b>SHROUDS</b>	PVC (C) / LSOH Silicone (3)

<b>IP RATING:</b>	IP66, Type 4X
<b>OPERATING TEMP:</b>	Neoprene Seals -35°C to +90°C Silicone Seals -60°C to +180°C
<b>MATERIALS:</b>	Brass or Stainless Steel
<b>PLATING:</b>	Electroless Nickel