




PRODUCT TYPE EC*S*M

Single Seal Barrier Gland featuring Peppers T2000 or T1000 Compound with Male Thread for Conduit Connection

Ex db : Ex eb : Ex nR : Ex ta : IP66 : IP68 : IP69

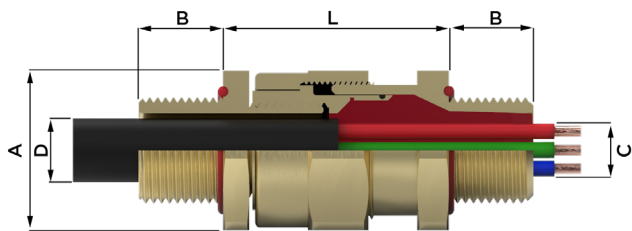

EXAMPLE PART NUMBERING:
EC2-SBM20/MP/M20/050NPT

EC	Eclipse style barrier gland for use with Peppers T1000 or T2000 compound	
2	Peppers T1000 (1) - Peppers T2000 (2)	
S	Gland featuring a compound (Barrier) Inner Seal for use with conduit	
B	Brass (B) / Stainless Steel (S)	
M	Back End Configuration: Male (M)	
OPTIONS	K-V-H	Locknut & Nylon (K), Fibre (V) or PTFE (H) IP Washer
	T	Including Earth Tag
	S	Including Serrated Washer
	1	Quantity per kit
	20	Gland shell size
NP	Nickel Plated	
M20	M20 x 1.5 Male Entry Thread	
050NPT	1/2"NPT Male Connection Thread	

OPTIONAL ACCESSORIES:

LOCKNUT	Brass (ACBLN) / Stainless Steel (ACSLN)
EARTH TAG	Brass (ACBET) / Stainless Steel (ACSET)
IP WASHERS	Nylon (ACNSW) / Fibre (ACFSW) / PTFE (ACPSW)
SERRATED WASHERS	Stainless Steel (ACSSW)

IP RATING:	IP66 & IP68 (100 metres - 7 days) & IP69
OPERATING TEMP:	T1000: -60°C to +135°C T2000: -60°C to +120°C
MATERIALS:	Brass or Stainless Steel
PLATING:	Electroless Nickel
COMPOUND:	Peppers T-1000 Compound / Peppers T-2000 Compound

CABLE GLAND SELECTION TABLE
(ALL DIMENSIONS IN mm)

Gland size	Entry Thread Size		Metric Thread Length [B]	Female Entry Threads		Gland Sealing Range - Cable Sheath & Cores					Nominal Protrusion Length [L]	Dimensions/Weight (Metric)		
	Metric	NPT		Metric	NPT	Max Number of Cores [C] [T1000]	Max Number of Cores [C] [T2000]	Max Ø Over Cores [C]	Min Inner Sheath [T2000]	Max Outer Sheath [D]		Across Flats [A]	Across Corners	Weight (Kgs)
16S	M16 x 1.5	3/8"	16	M16	3/8"	12	12	8.9	4.0	10.0	56	25.4	28.0	0.139
20	M20 x 1.5	1/2" or 3/4"	16	M20	1/2" or 3/4"	40	20	12.5	4.0	14.0	58	30.0	33.0	0.192
25	M25 x 1.5	3/4" or 1"	16	M25	3/4" or 1"	60	30	16.5	8.0	18.5	63	37.6	41.4	0.291
32	M32 x 1.5	1" or 1 1/4"	16	M32	1" or 1 1/4"	80	50	23.5	14.0	26.3	64	46.0	50.6	0.449
40	M40 x 1.5	1 1/4" or 1 1/2"	16	M40	1 1/4" or 1 1/2"	130	65	28.8	16.0	32.2	60	55.0	60.5	0.603
50S	M50 x 1.5	1 1/2" or 2"	16	M50	1 1/2" or 2"	200	100	34.2	20.0	38.2	66	65.0	71.5	0.678
50	M50 x 1.5	2"	16	M50	2"	400	100	39.4	20.0	44.1	66	65.0	71.5	0.678
63S	M63 x 1.5	2" or 2 1/2"	19	M63	2" or 2 1/2"	400	130	44.8	30.0	50.1	70	80.0	88.0	1.062
63	M63 x 1.5	2 1/2"	19	M63	2 1/2"	425	130	50.0	30.0	56.0	70	80.0	88.0	1.062
75S*	M75 x 1.5	2 1/2" or 3"	19	M75	2 1/2" or 3"	425	-	55.4	-	62.0	70	90.0	99.0	1.165
75*	M75 x 1.5	3"	19	M75	3"	425	-	60.8	-	68.0	70	90.0	99.0	1.165
80*	M80 x 2.0	3" or 3 1/2"	25	M80	3" or 3 1/2"	425	-	64.4	-	72.0	87	104.7	115.2	2.492
85*	M85 x 2.0	3" or 3 1/2"	25	M85	3" or 3 1/2"	425	-	69.8	-	78.0	85	104.7	115.2	2.051
90*	M90 x 2.0	3 1/2" or 4"	25	M90	3 1/2" or 4"	425	-	75.1	-	84.0	85	114.3	125.7	2.455
100*	M100 x 2.0	3 1/2" or 4"	25	M100	3 1/2" or 4"	425	-	80.5	-	90.0	85	114.3	125.7	2.223

NOTES

- Gland size does not necessarily equate to the entry thread size.
- The IP O-ring seal is only available on metric entry threads. IP washers can be supplied for tapered entry threads
- Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supplies cable glands with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. We usually incorporate a thread run out according to general machining techniques and parts will not have a full form thread for the entire length.

Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.

- When selecting IP Washer & Shroud material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- The gland is supplied with the correct amount of compound, gloves and instructions to allow one complete termination.
- Where approval in addition to UKEX, ATEX and IECEx is required, this must be clearly requested at time of enquiry / order.
- * Size 75S and above only available with T1000 Compound.

PRODUCT DESCRIPTION

"EC"-S"M" type glands, used in any orientation, are certified Flameproof Ex db, Increased Safety Ex eb, Restricted Breathing Ex nR and Dust Protected Ex ta. They are suitable for use in Group I Mining, Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dusts Groups IIIA, IIIB and IIIC. Commonly referred to as a "Conduit Stopper Box" they are suitable for use with conductors carried in conduit or as a line bushing for terminating flying leads. They provide a compound barrier Ex db & IP seal on the cable inner cores, eliminating damage to cables that exhibit "cold flow" characteristics. The unique features include, Peppers T1000 or T2000 compound that enables a quick and easy installation. An innovative barrier chamber that allows for a full inspection of the compound fill. The gland maintains IP66, IP68 to 100 metres and IP 69. Is deluge proof without the use of an additional seal or deluge boot. It is supplied with an IP O-ring seal as standard on metric entry threads. The gland is supplied with a male conduit connection thread.

COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-15, EN 60079-31
IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-15, IEC 60079-31 & IEC 60529

CERTIFICATION:

UKEX	I M2 II 1D 2G Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
ATEX	I M2 II 1D 2G Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
IECEX	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
CCC - China	Ex d I Mb / Ex d IIC Gb / Ex e I Mb / Ex e IIC Gb / Ex nR IIC Gc / Ex tD A20
CCoE - India	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
ABS	Specified ABS Rule
LLOYD'S	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da

CERTIFICATION No:

UKEX	CML 21UKEX1036X & CML 21UKEX4037X
ATEX	CML 19ATEX1113X & CML 19ATEX4114X
IECEX	IECEX CML 19.0035X
CCC - China	2022312313000471
CCoE - India	PESO P494321/17 & P494321/20
ABS	20-LD1944057-PDA
LLOYD'S	LR2124442TA

Eclipse featuring the New T2000 Compound

- Hand operated No Mixing VMS Cartridge
- Fast setting compound. Conductor termination can be effected from 60 minutes @ 23°C
- Featuring Peppers unique "no ferrule" technology allowing it to be fully retractable and inspectable.
- Robust Compound for extreme conditions.
- Deluge proof without the requirements of additional seals or boots.
- Built in interface seal with metric threads.