




PRODUCT TYPE E8XCM

Double Compression Gland for Armoured Flat Cable featuring a Male Conduit Connection

Ex db : Ex eb : Ex nR : Ex ta : IP66 : IP68 : Class I Zone 1 : AEx eb : AEx ta

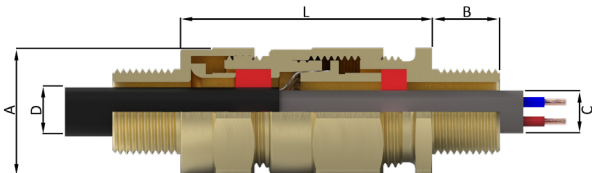

PRODUCT DESCRIPTION

"E8XCM" type glands are certified Flameproof Ex db, Increased Safety Ex eb, Restricted Breathing Ex nR and Dust Protected Ex ta. They are suitable for use in Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dust Groups IIIA, IIIB and IIIC. Also certified for Zone and Division installations for use with Marine Shipboard and Tray Cables under the NEC and CEC. Developed for flat cables, they provide controlled Ex db sealing and have been tested to IP66 and IP68 to 50 metres. The "E8XCM" version is designed to accommodate armoured cables, sealing on the inner and outer sheaths and also incorporates a detachable armour specific clamping system. The gland features a male conduit connection thread as standard. A termination suitable for EMC protection can be made using armoured cables with these glands.

COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-15, EN 60079-31
IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31 & IEC 60529
C22.2 (see certificate), CAN/CSA 60079-0/1/7/31
UL514B, UL1203, UL2225, UL50E, ANSI/UL 60079-0/7, ISA 60079-31

EXAMPLE PART NUMBERING:
E8XCMF050NPT/NP/20/M20

E	Gland designed for use with Armoured Cables
B	Silicone Seals for flat cables
X	Detachable Clamping for Braid Armour
CM	Male Conduit Connection Thread
B	Brass (B) / Stainless Steel (S)
F	Multiple Certification
OPTIONS	K-V-H Locknut, Earth Tag & Nylon (K), Fibre (V) or PTFE (H) IP Washer
	S Including Serrated Washer
	1 Quantity per kit
050NPT	1/2"NPT Male Conduit Connection Thread
NP	Nickel Plated
20	Gland shell size
M20	M20 x 1.5 Male Entry Thread

OPTIONAL ACCESSORIES:

LOCKNUT	Brass (ACBLN) / Stainless Steel (ACSLN)
EARTH TAG	Brass (ACBET) / Stainless Steel (ACSET)
IP WASHERS	Nylon (ACNSW) / Fibre (ACFSW) / PTFE (ACPSW)
SERRATED WASHERS	Stainless Steel (ACSSW)

IP RATING:	IP66 & IP68 (50 metres - 7 Days), Type 4X
OPERATING TEMP:	Silicone Seals -60°C to +180°C
MATERIALS:	Brass or Stainless Steel
PLATING:	Electroless Nickel

CABLE GLAND SELECTION TABLE
(ALL DIMENSIONS IN mm)

Gland Size	Entry Thread Size		Metric Thread Length [B]	Conduit Connection Thread		Cable Inner Sheath [C]				Cable Outer Sheath [D]				Armour Acceptance Range	Nominal Protusion Length [L] (Metric)	Dimensions/Weight (Metric Versions)		
	Metric	NPT		Metric	NPT	Width	Thickness	Width	Thickness	Width	Thickness	Width	Thickness			Across Flats [A]	Across Corners	Weight (Kgs)
20S	M20 x 1.5	1/2" or 3/4"	16	M20 x 1.5	1/2" or 3/4"	6.3	11.7	4.0	7.0	7.9	11.7	4.5	7.0	0.10-0.30	63	30.0	33.0	0.230
20R	M20 x 1.5	1/2" or 3/4"	16	M20 x 1.5	1/2" or 3/4"	8.1	13.5	5.8	6.2	10.7	16.1	5.4	8.3	0.10-0.30	64	30.0	33.0	0.231
20	M20 x 1.5	1/2" or 3/4"	16	M20 x 1.5	1/2" or 3/4"	10.3	13.5	5.6	9.0	11.0	13.5	4.5	9.0	0.10-0.30	63	30.0	33.0	0.230

CERTIFICATION:

UKEX	II 1D 2G Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIC Da II 3G Ex nR IIC Gc
ATEX	II 1D 2G Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIC Da II 3G Ex nR IIC Gc
IECEX	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIC Da
CEC - Canada	Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIC Da Class II Group E, F & G Class III Type 4X
NEC - USA	Class I Zone 1 AEx eb IIC Gb / Zone 20 AEx ta IIC Da Class II Group E, F & G Class III Type 4X
EAC	1Ex d IIC Gb X / 1Ex e IIC Gb X / 2Ex nR IIC Gc X / Ex ta IIC Da X
INMETRO - Brazil	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIC Da
CCC - China	Ex d IIC Gb / Ex e IIC Gb / Ex nR IIC Gc / Ex tD A20
UKRAINE	II 2G Ex db IIC Gb / II 2G Ex eb IIC Gb / II 3G Ex nR IIC Gc / II 1D Ex ta IIC Da
CCoE - India	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIC Da
ABS	Specified ABS Rules
LLOYD'S	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIC Da
RS - Russia	Ex d IIC Gb / Ex e IIC Gb / Ex ta IIC Da

CERTIFICATION No:

UKEX	CML 21UKEX1033X & CML 21UKEX4043X
ATEX	CML 19ATEX1346X & CML 19ATEX4109X
IECEX	IECEX CML 19.0104X
CEC - Canada	CSA 1356011
NEC - USA	CSA 1356011
EAC	RU C-GB.BH02.B.00693-18
INMETRO - Brazil	NCC 13.2187 X
CCC - China	2021312313000447
UKRAINE	CLJ 18.0321 X
CCoE - India	PESO P4943217 & P494321/13
ABS	20-LD1944057-PDA
LLOYD'S	LR2124442TA
RS - Russia	19.00189.278

NOTES

- Gland size does not necessarily equate to the entry thread size.
- Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supply products with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. We usually incorporate a thread run out according to general machining techniques and parts will not have a full form thread for the entire length. Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.
- When selecting IP Washer & Shroud material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- Where approval in addition to UKEX, ATEX, IECEX and CSA is required, this must be clearly requested at time of enquiry / order.